

Product Datasheet model uvex super OTG 9169 412

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics


- classic overspecs for prescription spectacle wearers with an innovative temple concept and a flat lens that offers a wide field of vision
- flexible side arms with soft grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex 's proven supravision coating technology – permanent anti-fog lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- metal-free

2. Technical Details Body**Frame**

Material	PA/TPE
Colour	pale pink, light grey

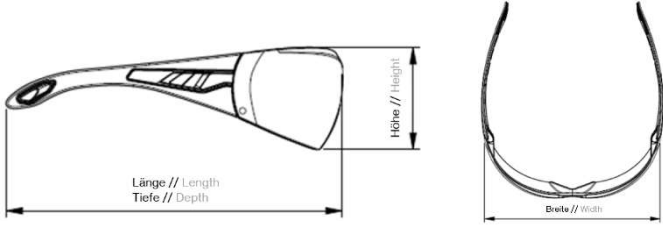



Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE
Marking according to ANSI	Z87

3. Technical Details Lens

Material	PC
Thickness	2,1 mm at PD
Coating	uvex supravision ETC
Colour	clear
UV protection	UV400
Marking	
Filter	2C-1,2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	
Additional Marking according to ANSI	
Manufacturer 's ID code	W
Impact mark	+

4. Logistical Information

Product

Weight	37g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	80 x 153 x 58		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101940151	4031101940151	4031101940151
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	80 x 155 x 54	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	37	370	5,920
Gross weight in approx. g	45	555	9,780
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170 + ANSI
PPE Category	Category II